



Hyde Park

ENVIRONMENTAL

Type 90 Series -

Safety Storage Cabinet 2 Door, 3 Shelf

HFC 235


SAFETY CABINET FOR STORAGE OF FLAMMABLE PRODUCTS WITH
FIRE RESISTANCE Type90 MINUTES CERTIFIED ACCORDING TO
EN14470-1 EN16121

Construction

- Completely built in steel sheet with thickness 1 / 1.5 mm at cold bent painted with anti-acid epoxy powders and oven cured at 200 ° C
- Particular insulation formed by high density fiber panels (free of Fibroceramic) for high temperatures (800 ° C) and calcium sulphate panels
- Internal finishing panels in melamine laminate with high resistance to even aggressive vapors
- Certification according to the new EN 14470-1 standard

Specifications

- Hydraulic closing of doors with internal temperature above 47 ° C
- Lock with key and door lock
- Adjustable feet
- Automatic closing valves (70 ° C) for air inlet and outlet products, certified 90 minutes, placed on the top and bottom of the cabinet
- Ejection hole diam. 100mm on the roof of the cabinet for explosion protection
- Sparkproof hinge
- 3cm thermo-dilating gasket
- 3 painted steel tray shelves (16L $\approx$ capacity), certified 80Kg capacity. Size: 1093x420x39h mm, adjustable in height with stainless steel pins on a painted steel rack
- Painted steel bottom bund with support grid
- Dimension: 1093x445x100h mm (45L $\approx$ capacity)
- "Earth" terminal to prevent electrostatic charges – requires site connection if this feature is required

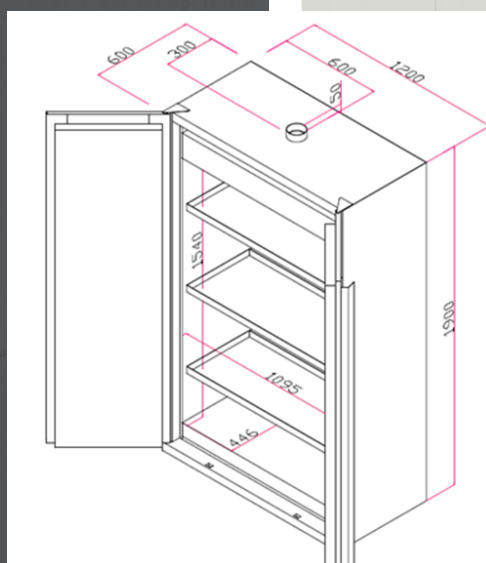

HEAD OFFICE:

21 Springfarm Industrial Estate
Ballymena Road
Antrim
Northern Ireland
BT41 4NT

UK OFFICE:

Castle Court
Bodmin Road
Coventry
England
CV2 5DB

ROI OFFICE:

Unit 134 Slaney Close
Dublin Industrial Estate
Glasnevin
Dublin 11
DV11 VX31

UK:

0800 7566 388

ROI:

01 506 0633

INTERNATIONAL:

004428 9446 7469